


32 283 Prep Sink Dual Spray Pull Down

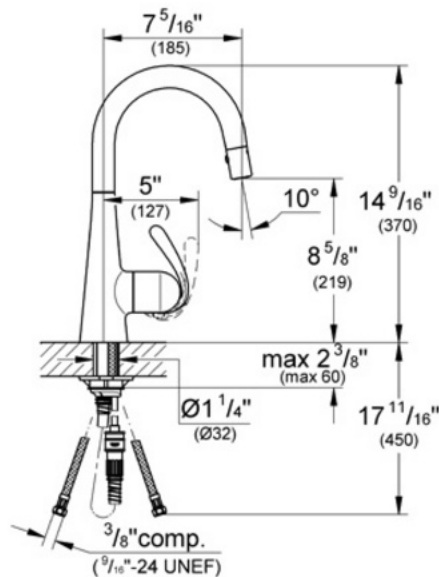

Description

GROHE RealSteel® Stainless Steel Construction- produced from solid, Grade 304 stainless steel (SD0 only)
 000, DC0=Solid Brass Body
 GROHE SilkMove® Ceramic Cartridge
 SpeedClean® Anti-Lime System
 Locking Push Button Control -- to switch from regular flow to spray
 Stainless Steel Braided Flexible Supplies
 Quick Installation System
 Single Lever Handle
 Forward Rotation Lever, does not hit backsplash
 7 5/16" Spout Reach

Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi
 (9.5 lpm)

Code Compliance

ASME/ANSI A112.18.1M
 ANSI/NSF Standard 61
 ADA Compliant

Finish Options

32 283 000 Starlight® Chrome
 32 283 SD0 Stainless Steel
 32 283 DCO SuperSteel