"BY APPROVING THIS DRAWING YOU ARE ENSURING		LIGHTED MIRROR SPECIFICATION REQUIREMENTS: UL 1598 approved including section 16.23 glass support te
APPROVED BY:	DATE:	Finger print protection (edge frosted mirrors only)
REVISION REQUESTED		HardCoat - anti-corrosive backing Maintenance-free over 7 Years Safety Backed Made in America
1.75	BOULEVARD MIRROR 36.00" X 6.00" FROSTED AREA 3.00 FROST	30° TILT 4.94 5.32 SPECIFICATION: SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM WANTY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM WANTY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE FIVE DESIGN OF THE BATHROOM SPECIFY THE TOD OF THE BATHROOM SPECIFY THE BATHROOM SPECIFY THE SPECIFY THE BATHROOM SPECIFY THE BATHROOM SPECIFY THE SPECIFY THE BATHROOM SPECIFY THE SPECIFY THE SPECIFY THE BATHROOM SPECIFY THE SPECIF
36.00	CHASSIS KNOCKOUT	SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM VANITY. THE TOP OF THE FIXTURE SHOULD BE A MINIMUM OF 6'6" OFF THE FINISHED FLOOR TO ACCOMMODATE THE HEIGHT OF A HOTEL GUEST. THE MC CABLE IS BROUGHT IN THROUGH THE CHASSIS KNOCKOUT. INSERT GROUND WIRE IN GROUNDED CONNECTOR. INSERT HOT AND NEUTRAL WIRE INTO LUMINAIRE DISCONNECT. NO ELECTRICAL BOX REQUIRE ELECTRICAL POWER SHOULD BE CONTROLLED BY A LIGHSWITCH. FIXTURE SHOULD BE MOUNTED TO A MECHANICALLY
MIRROR		FIXTURE SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT. MOUNTING HOLES ARE PROVIDED IN THE CHAS POWER REQUIREMENTS: 120-277 VOLTS, .6528 AMPS
	MIRROR 36.00" X 30	LAMP SPECIFICATION: NOMINAL LENGTH (in): 36 NOMINAL WATTAGE: 39 BULB: 2 X T5HO AVG RATED LIFE (hrs): 35,000 CCT (K): 3000 LUMENS: 3325 CRI: 85

*PATENTED

ELECTRIC MIRROR BOU-01-36.00X6.00 & MIR-36.00X30.88

*DV ADDDOVING THE DD AVAING VOLLADE ENGLIDING THAT THESE DIVACUSONS HAVE BEEN FIELD VEDISIED


SALES AID - 10/5/11

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

REV. A DIMS IN INCHES PG.1 OF 2 SCALE: 1:12

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

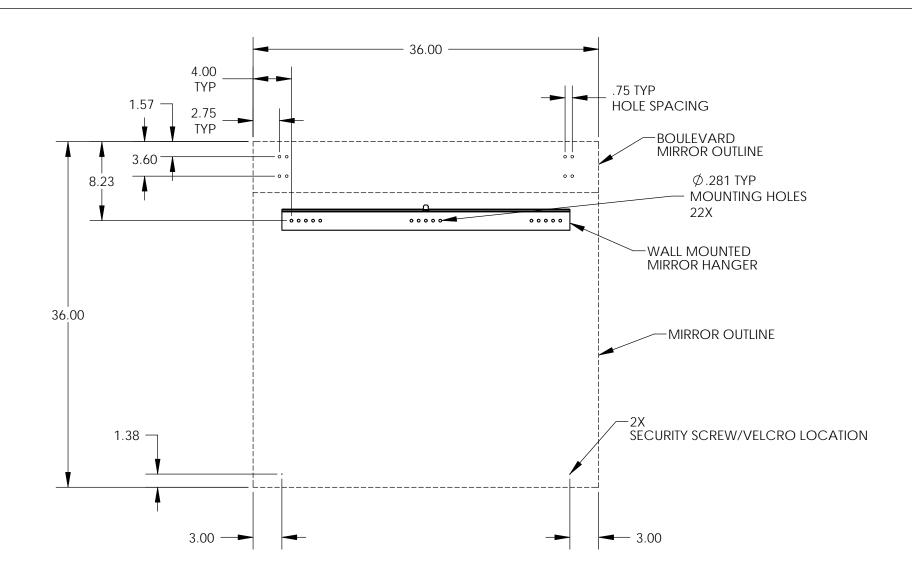

WALL MOUNTING DETAILS

ELECTRIC MIRROR BOU-01-36.00X6.00 & MIR-36.00X30.88

SALES AID - 10/5/11

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

REV. A DIMS IN INCHES PG.2 OF 2 SCALE: 1:10

CONTACT US: consultants@electricmirror.com T+1.425.776.4946