


*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY: _____ DATE: _____

☐ REVISION REQUESTED

LIGHTED MIRROR SPECIFICATION REQUIREMENTS:
UL 1598 approved including section 16.23 glass support test
Finger print protection (edge frosted mirrors only)
HardCoat - anti-corrosive backing
Maintenance-free over 7 Years
Safety Backed
Made in America

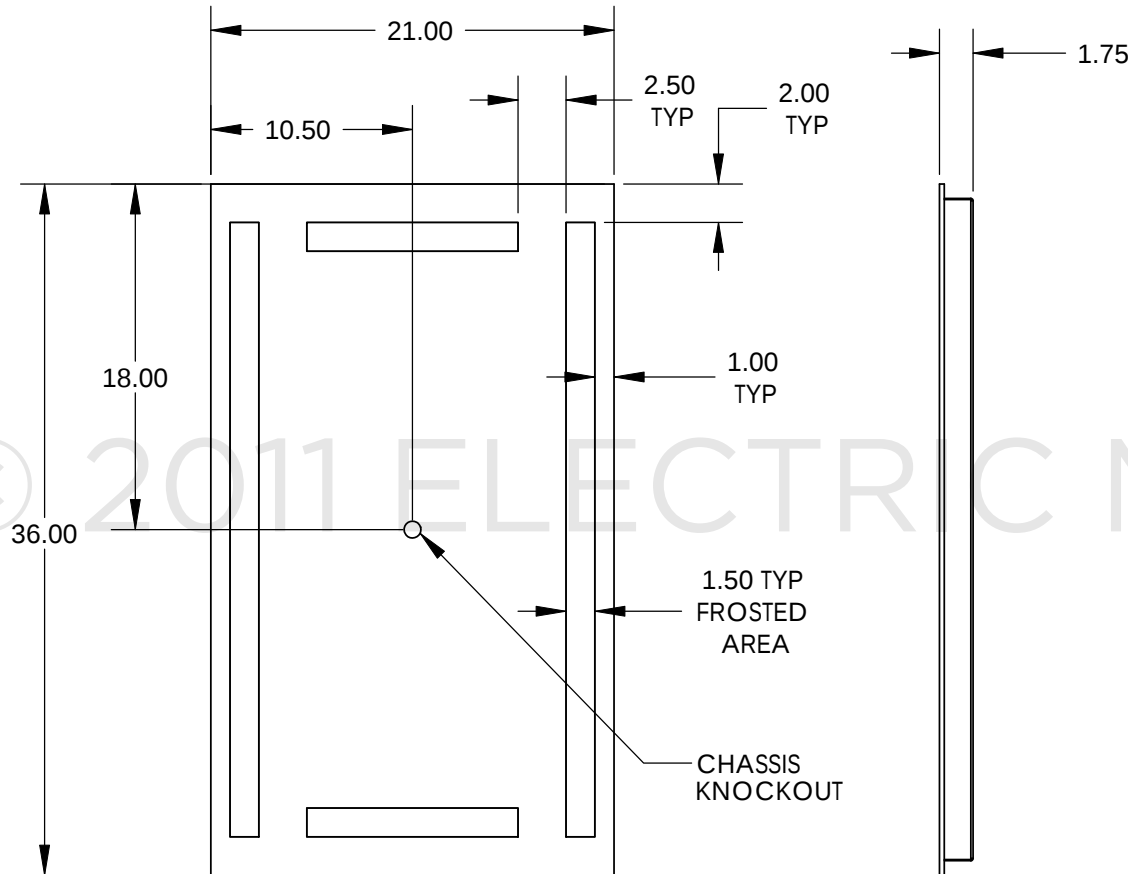

SPECIFICATION:

SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM VANITY. THE TOP OF THE FIXTURE SHOULD BE A MINIMUM OF 6" OFF THE FINISHED FLOOR TO ACCOMMODATE THE HEIGHT OF A HOTEL GUEST.

THE MC CABLE IS BROUGHT IN THROUGH THE CHASSIS KNOCKOUT AND CONNECTED TO TERMINAL CONNECTOR. NO ELECTRICAL BOX REQUIRED. ELECTRICAL POWER SHOULD BE CONTROLLED BY A LIGHT SWITCH. 120 OR 240 VOLT VERSIONS.

FIXTURE SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT. MOUNTING HOLES ARE PROVIDED IN THE CHASSIS.

POWER REQUIREMENTS:

110 - 277 VAC, 1.00 - .39

LAMP SPECIFICATION:

NOMINAL WATTAGE: 55
BULB: CIRCLINE T5 X 2
OUTSIDE DIAMETER (in): 12
AVG RATED LIFE (hrs): 20,000
CCT (K): 3000
LUMENS: 3200
CRI: 82

*PATENTED

ELECTRIC MIRROR® 2011


EFI-21.00X36.00

SALES AID - JUNE 21, 2010

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

DIMS IN INCHES	REV. B
SCALE: 1:10	PG.1 OF 2
CONTACT US: consultants@electricmirror.com T+1.425.776.4946	

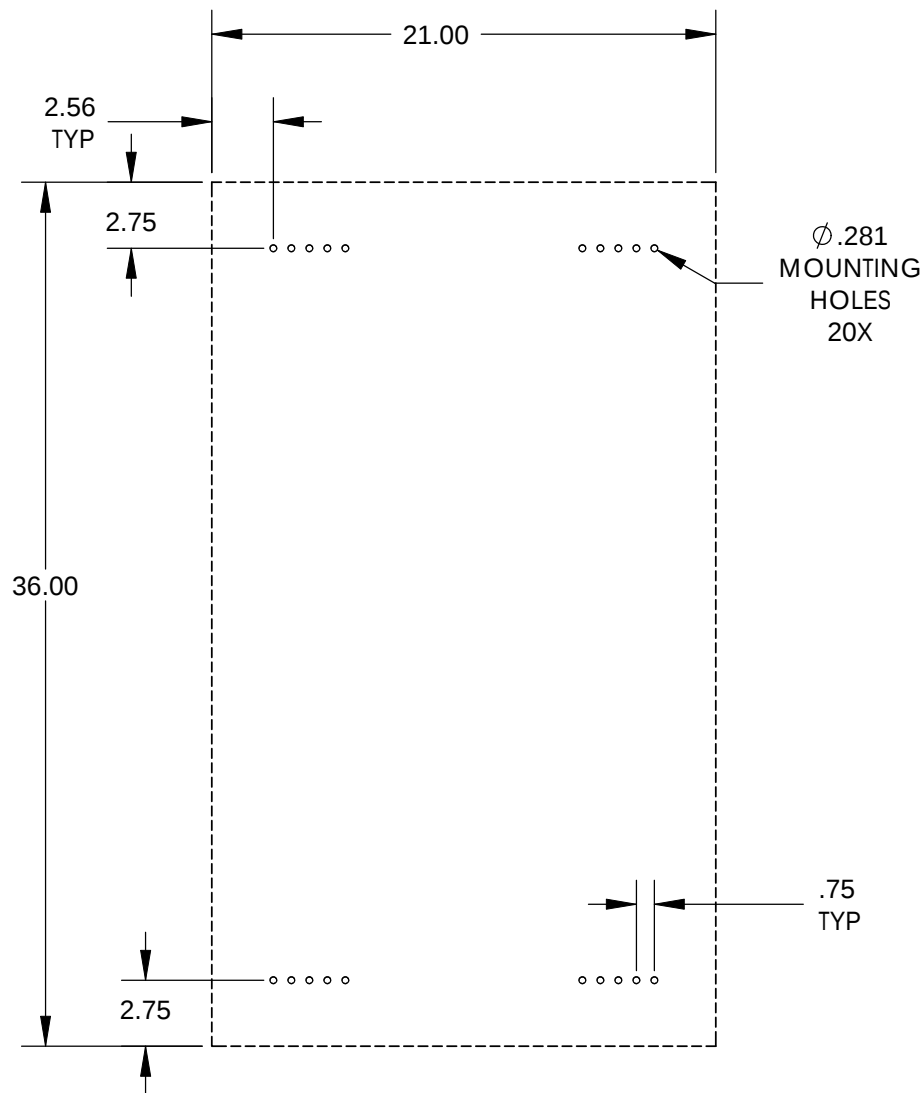

WALL MOUNTING DETAILS

ELECTRIC MIRROR[®] 2011

EFI-21.00X36.00

SALES AID - JUNE 21, 2010

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

DIMS IN INCHES	REV. B
SCALE: 1:8	PG.2 OF 2
CONTACT US: consultants@electricmirror.com T+1.425.776.4946	