
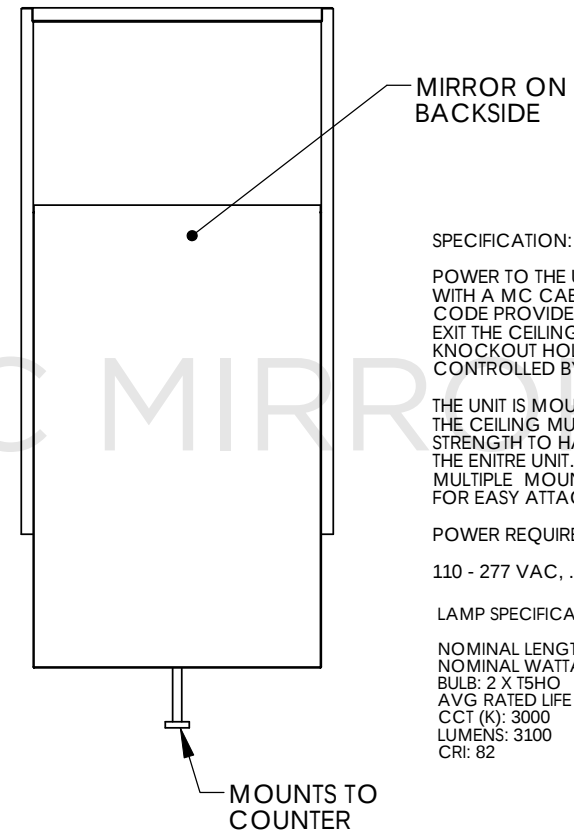
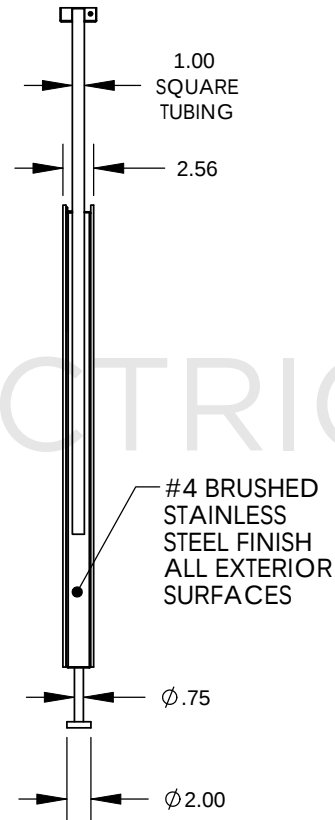
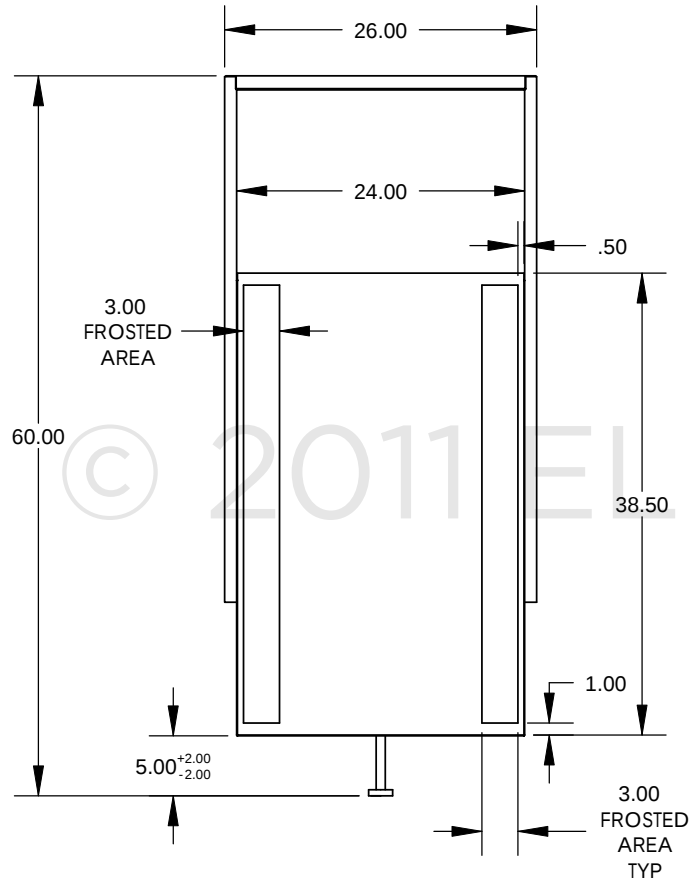


*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY: _____ DATE: _____

☐ REVISION REQUESTED

LIGHTED MIRROR SPECIFICATION REQUIREMENTS:
UL 1598 approved including section 16.23 glass support test
Finger print protection (edge frosted mirrors only)
HardCoat - anti-corrosive backing
Maintenance-free over 7 Years
Safety Backed
Made in America

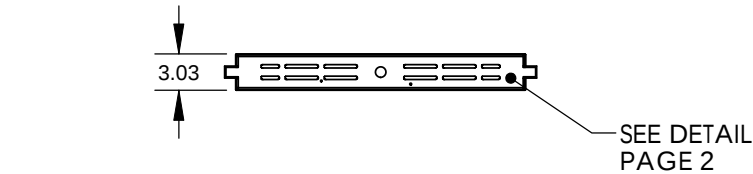

SPECIFICATION:

POWER TO THE UNIT SHOULD BE SUPPLIED WITH A MC CABLE OR AS ELECTRICAL CODE PROVIDES. THE CABLE SHOULD EXIT THE CEILING AND ENTER THE KNOCKOUT HOLE. POWER MUST BE CONTROLLED BY A LIGHT SWITCH.

THE UNIT IS MOUNTED TO THE CEILING. THE CEILING MUST BE SUFFICIENT IN STRENGTH TO HANDLE THE WEIGHT OF THE ENTIRE UNIT. UNIT COMES WITH MULTIPLE MOUNTING SLOTS TO ALLOW FOR EASY ATTACHMENT TO CEILING STUD.

POWER REQUIREMENTS:

110 - 277 VAC, .70 - .28 AMPS

LAMP SPECIFICATION:

NOMINAL LENGTH (in): 36
NOMINAL WATTAGE: 39
BULB: 2 X T5HO
AVG RATED LIFE (hrs): 35000
CCT (K): 3000
LUMENS: 3100
CRI: 82


ELECTRIC MIRROR® 2011 **ELE60-24.00X38.50**

SALES AID - MARCH 09, 2011


PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

DIMS IN INCHES	REV. A
SCALE: 1:16	PG.1 OF 2
CONTACT US: consultants@electricmirror.com T+1.425.776.4946	

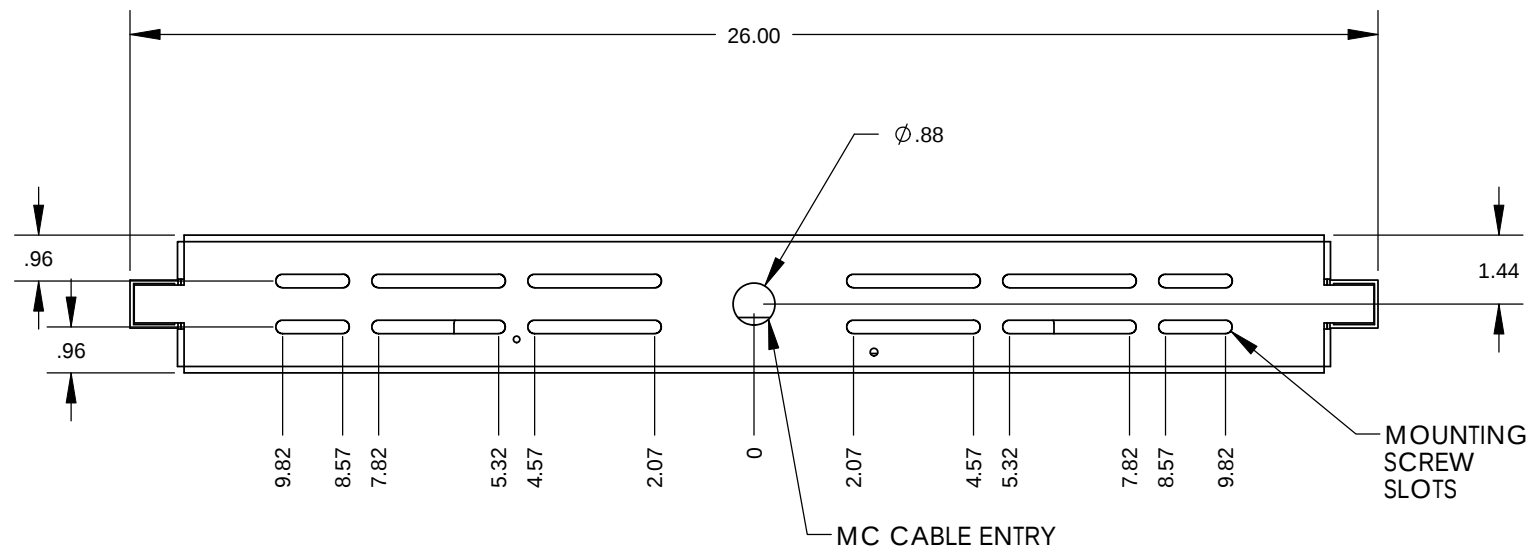

CEILING MOUNTING PLATE

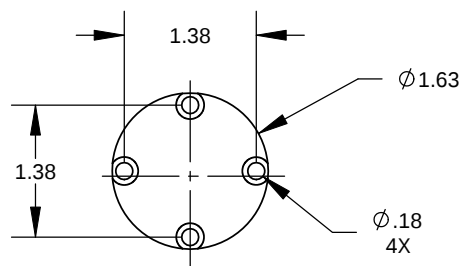

COUNTER MOUNTING PLATE

ELECTRIC MIRROR[®] 2011 ELE60-24.00X38.50

SALES AID - MARCH 09, 2011

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

DIMS IN INCHES	REV. A
SCALE: 1:4	PG.2 OF 2
CONTACT US: consultants@electricmirror.com T+1.425.776.4946	