

TOTO®

MS984244CFG Ryohan™ One Piece Toilet, Universal Height, 1.6 GPF




MS984244CFG - Ryohan Universal Height Toilet with SoftClose® Seat



Double Cyclone flushing system with maximum cleaning action for a cleaner, more hygienic toilet bowl.



SanaGloss glaze seals the surface, creating a finish that actually repels stains caused by buildup of mineral deposits.

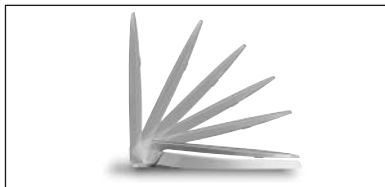

Complete with SoftClose seat, or upgrade to a Washlet®.

- Elegant one piece toilet design coordinated to match other Ryohan fixtures and fittings
- Double Cyclone® Flushing System
- Universal Height for maximum comfort
- SanaGloss® ceramic glaze
- Skirted styling with concealed trapway for easy cleaning
- Clean rim design with no holes for easy cleaning
- Large water surface
- Powerful, fast, quiet flush

ADA Height Compliant one piece toilet. Low consumption (6Lpf/1.6Gpf) Double Cyclone® flushing action.

Tank cover, fittings, Ryohan finish trip lever, Unifit Rough-in, and SoftClose® seat included.

■ MS984244CFG

Elongated ADA height compliant toilet with SoftClose® seat
(Available in: #01)

□ SS244

Ryohan SoftClose Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.



Colors:

Standard #01 Cotton

Trip Lever:

Standard #Y Ryohan finish

MS984244CFG

Ryohan™ One Piece Toilet, Universal Height, 1.6 GPF

■ PERFORMANCE

The TOTO® Ryohan Toilet features the Double Cyclone® flushing system. Using two powerful nozzles, the Double Cyclone flushing system creates a forceful centrifugal action that cleans the rim and bowl thoroughly with every flush. The rim has no holes, which makes it easier to clean and offers a seamless appearance.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf

Flush System: Double Cyclone

Min. Water Pressure:

8 psi (Static)

Water Surface: 7-7/8" x 9-1/4"

Trap Dia.: 2-1/8"

Rough-in: 12" (Standard)

Trap Seal: 2-1/8"

Warranty: Five Year Limited Warranty

Material: Vitreous China

Shipping Weight: **MS984244CFG**
105 lbs.

Shipping Dimensions:

MS984244CFG
29-1/2"L x 22"W x 27"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2, CAN/CSA B45 requirements, and LASPS for rebate program.

Listing / Approvals: C-UPC, City of Los Angeles, State of Massachusetts, and others.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements for height where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side.

These dimensions and specifications are subject to change without notice.

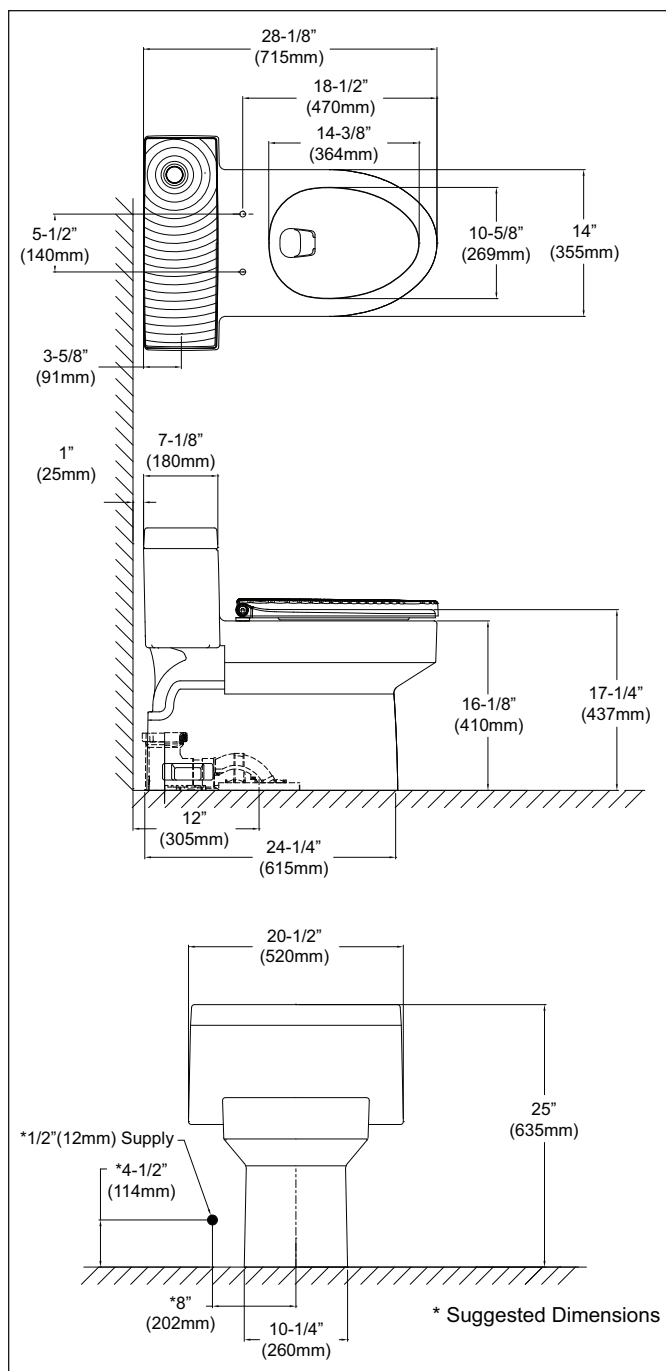

MS984244CFG - Ryohan Universal Height, One-Piece Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260

Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com

Printed in U.S.A. © TOTO LTD. 05/08 #A10520

Printed on recycled paper

REV 07/08