

GENERAL SPECIFICATIONS:

Tub Size	78.25" x 56.5" x 26"
Bathing Well	length: 66" top / 43.5" bottom width: 41.5" top / 36" bottom depth at overflow: 19.75"
Plumbed Weight	185 lbs / 83.99 kg
Soaker Weight	120 lbs / 54.48 kg
Average Fill	54 gal to above jet level
Maximum Fill	127 gal to overflow
Undermountable	No

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.

NOTE: Not recommended as a tub / shower combination.

ELECTRICAL SPECIFICATIONS:

Required Electrical Service	110 Volt
Air Bath or Standard Whirlpool	1-15 amp GFCI
Standard Whirlpool w/Air	1-15 amp GFCI & 1-20 amp GFCI
Ultra-Therapy	2-20 amp GFCI
Ultra-Therapy w/Air	2-20 amp GFCI

CSA Certified C/US, NAHB Certified, ANSI Z124.1 for plastic tubs and ANSI 112.19.7 for whirlpool components.


NOTE: See electrical specifications page for electrical requirements of options.

Neptune MTDS-30

78.25" x 56.5" x 26"




Shown with Standard Therapy Package and optional Fill-Flush.

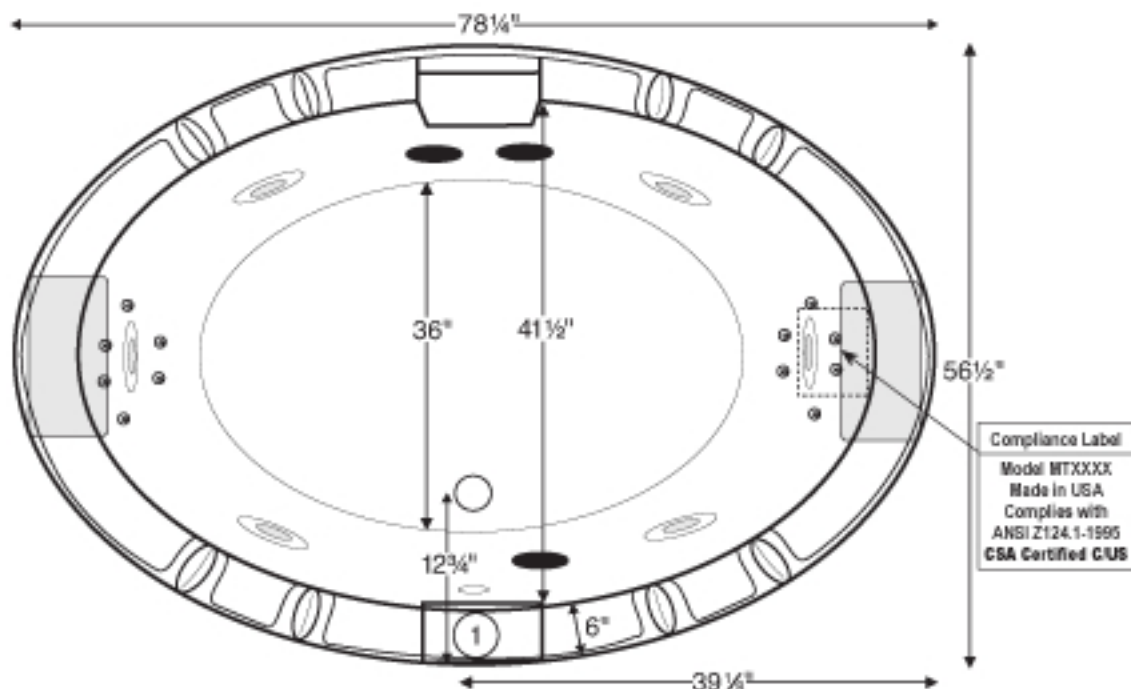

Compliance Label
Model MTXXXX
Made in USA
Complies with
ANSI Z124.1-1995
CSA Certified C/US

Numbered location on tub deck is possible Fill-Flush, Hand-Held Shower or Breda location. When both are specified, the Hand-Held Shower or Breda may be located on the tub flange above any of the four jets on the sides of the tub.

Shown with Ultra-Therapy Package.

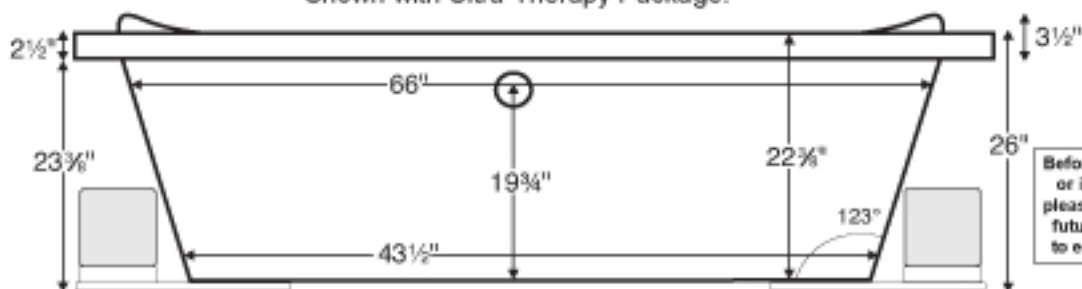

Before ordering
or installing,
please consider
future access
to equipment.

INSTALLATION: Add 1"-3" to height of tub for bedding compound. MTI recommends Quikrete Sand Mix. **Air Baths add approximately 2"-3" to height of tub.** Please measure tub before building tub decking. Suction and control locations may vary. Drawing shows best pump location. Alternate locations available—call MTI for details. Measurements are $\pm 1/2"$ and are subject to change without notice. Data herein supersedes all previous prior to publication date shown below. Tubs with more than one pump or blower will require additional service access.

