



Codes/Standards Applicable

- ANSI Z124.1.2
- CSA B45 Series

Whirlpool Bathtubs:

- UL1795
- ASME A112.19.7
- CSA C22.2 No. 218.2
- CSA B45.10

KEY BENEFITS

Unparalleled comfort for a compact tub
Raised bottom and curved lines maximize
massage benefits and relaxation

STANDARD FEATURE(S)

Centre drain
Integrated faucet area
Inclined armrests
Bi-level bottom
Ergonomic backrest

PLUMBER FEATURE(S)

Podium installation or with apron

COMMON OPTIONS

Flexible main hose 15 ft for electronic control
Metal trim kit for Aerofeel
Metal trim kit for whirlpool and combined
systems
[One chromatherapy light](#)
[Ozonator for whirlpool system](#)
Removable acrylic apron
Thermo-Acoustic system


Tiling flange
Waste and overflow
Water heater assembly
White foam cushion

MASSAGE SYSTEM(S)


[Aerofeel](#)
[Combined Hydromax and Aerofeel](#)
[Hydromax](#)
[Hydromax Rest™](#)
Hydromax with Backmax

Colors

Standard Acrylic Colors



Non-Standard Acrylic Colors

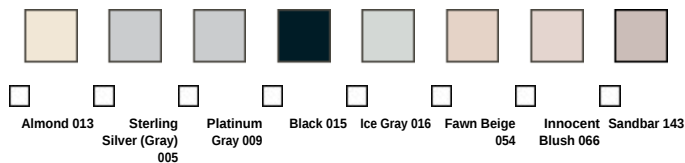

Colors shown are for reference purposes only and are subject to change without notice. Exact matches are not possible with your monitor display or printing method used.

Model Specifications, Options and Accessories

☒	No	Model	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	100073-000	BATHTUB	65 3/4 X 32 7/8 X 20 1/8	74	30
☐	100212-000	Removable acrylic apron	65 1/4-66 X 2 X 18 1/2	17	3.3
Water Capacity: Minimum: 38 gal. Maximum: 48 gal.					

Whirlpool Systems

☒	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	100073-004	HYDROMAX WITH BACKMAX White cushion included	65 3/4 X 32 7/8 X 20 1/8	119	30
☐	OPT 20141	HYDROMAX REST™	N/A	N/A	N/A

Air System

☒	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	100073-055	AEROFEEL	65 3/4 X 32 7/8 X 20 1/8	99	30

Combined Systems

☒	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	100073-094	COMBINED HYDROMAX AND AEROFEEL White cushion included	65 3/4 X 32 7/8 X 20 1/8	144	30
☐	OPT 20141	HYDROMAX REST™	N/A	N/A	N/A

Common Options

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	OPT 10053	One chromatherapy light (factory installed)	2 3/8	2.5	N/A
☐	OPT 10096	Thermo-Acoustic system (minimal installation required)	N/A	6	
☐	OPT 20175-001	Waste and overflow (included in product packaging) Available colors: White (001), Bone (004), Biscuit (007), Chrome (084), Polished Brass (085) and Brushed Nickel (105)		N/A	
☐	OPT 20175-004				
☐	OPT 20175-007				
☐	OPT 20175-084				
☐	OPT 20175-085				
☐	OPT 20175-105				

Whirlpool Options


☒	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	OPT 10095	Water heater assembly (factory installed)	9 X 5 X 3	2	N/A
☐	OPT 10106-084	Metal trim kit for whirlpools and combined systems (factory installed) Available colors: Chrome (084), Polished Brass (085) and Brushed Nickel (105)	N/A	1.5	
☐	OPT 10106-085				
☐	OPT 10106-105				
☐	OPT 20139	Ozonator for whirlpool system (factory-installed)		N/A	

Air System Options

☒	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	OPT 10119-084	Metal trim kit for Aerofeel electronic control only (factory installed) Available colors: Chrome (084), Polished Brass (085) and Brushed Nickel (105)	N/A	1.5	N/A
☐	OPT 10119-085				
☐	OPT 10119-105				

Accessories

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	10004306-001	White foam cushion with 2 suction pads (sold separately)	11 1/2 X 6 1/2 X 1	1	0.27
☐	10006916	Tiling flange. 1 X 67 1/4-in., 2 x 37 1/4-in (sold separately)		1.5	N/A
☐	10019708	Flexible Main Hose (15-ft. extension) for Electronic Control Air Massage - Kit (sold separately)	N/A	2.5	0.89
☐	10025720-001	Waste and overflow (included in product packaging) Available colors: White (001), Bone (004), Biscuit (007), Chrome (084), Polished Brass (085) and Brushed Nickel (105)		N/A	N/A
☐	10025720-004				
☐	10025720-007				
☐	10025720-084				
☐	10025720-085				
☐	10025720-105				

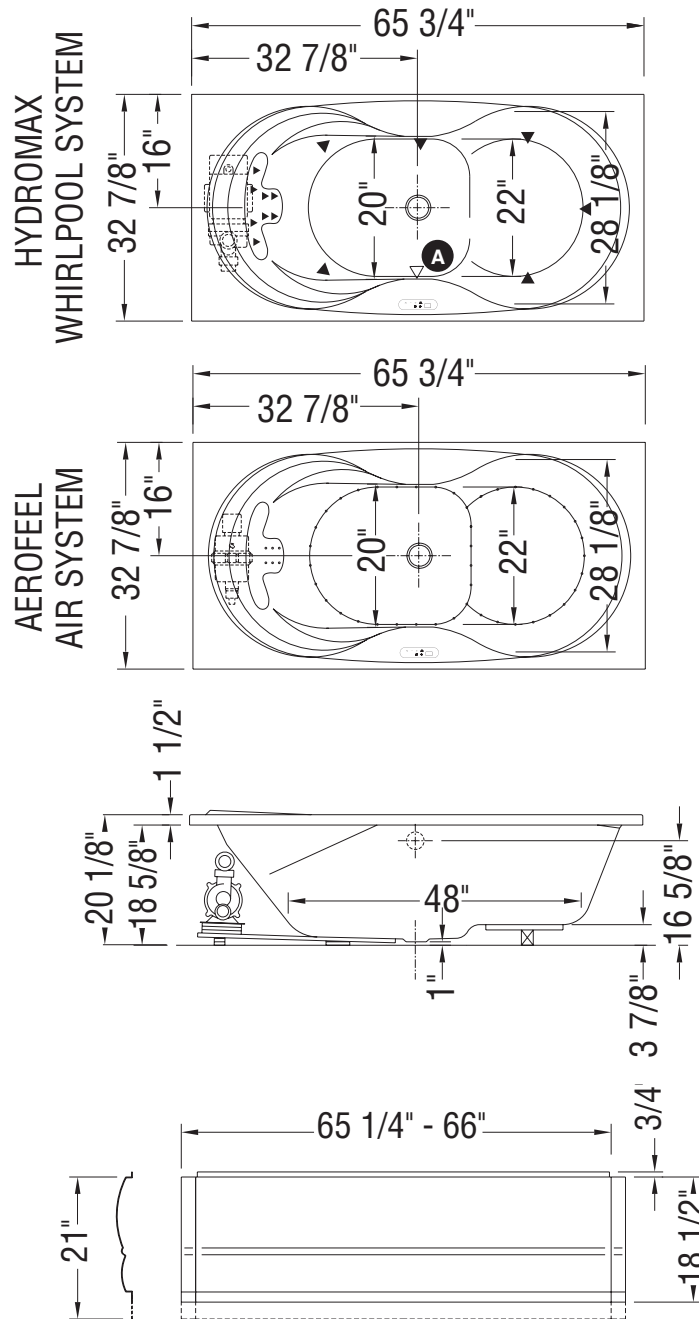

- (A) : Indicates overflow positioning
- (▲) : Indicates Hydromax whirlpool jets positioning
- (●) : Indicates Aerofeel airjets positioning
- (△) : Indicates suction positioning

All dimensions are approximate and subject to change without prior notice.
Please refer to installation guide before installing unit.

Bathtub base includes anti-vibration Neutra-Phone™ leg supports (not shown).

Canada	Alberta British Columbia Manitoba New Brunswick Newfoundland Nova Scotia Northwest Territories Ontario Prince Edward Island Quebec Saskatchewan Yukon Territory
United States	Alabama Alaska Arizona Arkansas California Colorado Connecticut Delaware District of Columbia Florida Georgia Hawaii Idaho Illinois Indiana Iowa Kansas Kentucky Louisiana Maine Maryland Massachusetts Michigan Minnesota Mississippi Missouri Montana Nebraska Nevada New Hampshire New Jersey New Mexico New York North Carolina North Dakota Ohio Oklahoma Oregon Pennsylvania Rhode Island South Carolina South Dakota Tennessee Texas Utah Vermont Virginia Washington West Virginia Wisconsin Wyoming
International	Jamaica Switzerland Korea China Taiwan Pilipinas Vietnam Malaysia Singapore Egypt Kuwait Dubai Qatar Saudi Arabia Bermuda Turks & Caicos Dominican Republic Panama Costa Rica Guatemala Colombia

Here are the electrical specifications for all MAAX Collection bathtub therapeutic systems offered in the United States.

PLEASE NOTE THAT SOME SYSTEMS MAY NOT BE AVAILABLE ON THE PRODUCT YOU HAVE SELECTED.

Please refer to the *Common Options* and *Massage System(s)* sections for more details.

HYDROFEEL	
Pump: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with these two options: Chromatherapy and Ambiance Set (Urban® Water Cascade)	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Pump	1.5HP / 120V / 12.5A / 60Hz
REST™ Pump Option	1HP / 120V / 9.4A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

HYDROMAX	
Pump: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with Chromatherapy (option).	
Pump 2 (for large bathtubs): Requires a dedicated circuit protected by a Class A GFCI.	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Pump	1.5HP / 120V / 12.5A / 60Hz
REST™ Pump Option	1HP / 120V / 9.4A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

AEROFEEL	
Blower: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with these two options: Chromatherapy and Ambiance Set (Urban® Water Cascade).	
Blower	1.4HP / 120V / 9.5A / 60Hz

COMBINED HYDROFEEL / AEROFEEL	
Blower: Requires a dedicated circuit protected by a Class A GFCI.	
Pump: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with these two options: Chromatherapy and Ambiance Set (Urban® Water Cascade).	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Blower	1.4HP / 120V / 9.5A / 60Hz
Pump	1.5HP / 120V / 12.5A / 60Hz
REST™ Pump Option	1HP / 120V / 9.4A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

COMBINED HYDROMAX / AEROFEEL	
Blower: Requires a dedicated circuit protected by a Class A GFCI.	
Pump: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with Chromatherapy (option).	
Pump 2 (for large bathtubs): Requires a dedicated circuit protected by a Class A GFCI.	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Blower	1.4HP / 120V / 9.5A / 60Hz
Pump	1.5HP / 120V / 12.5A / 60Hz
REST™ Pump Option	1HP / 120V / 9.4A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

CHROMATHERAPY	
Requires a dedicated circuit protected by a Class A GFCI.	

AMBIANCE SET (URBAN® WATER CASCADE)	
Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with Chromatherapy (option).	

Installation Note

Install this product according to the *Installation Guide*.
All electrical wiring must be done per national/local electrical codes.