

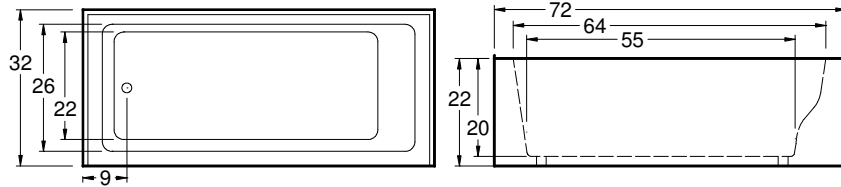





Tub pictured with optional waste &amp; overflow.


 All bathtub dimensions are  $\pm 1/2"$ .



### Builder Series



### Luxury Series




### Platinum Series




### Combination

(pump and blower location only)




### Airbath System II



### Airbath System III

N/A

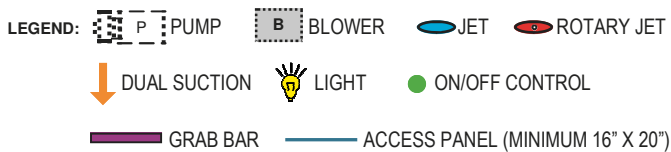

### INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.

### DIMENSIONS

72" x 32" x 22" (1829 x 813 x 559 mm)

Whirlpool Operating Gallons = 70 (Liters = 265)

Gallon to Overflow = 90 (Liters = 341)

**TUB FLOOR:** NON-Textured

**UNDERMOUNT:** No

### ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### STANDARD EQUIPMENT:

- Apron
- Molded Tile Flange

### OPTIONAL ACCESSORIES

- Chromotherapy\*
- Grab Bars: 9" \* - 14" - 16"
- High Density Insulation\*
- Inline Heater
- Jets: Additional or Rotary\*
- Pillows: 13"
- Quiet Pump with Built-in Heater Upgrade\*
- Remote Control Upgrade (Select Series Only)
- Trim Kit Upgrade\*
- Waste & Overflow\*

\*Standard on Platinum Series

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.