



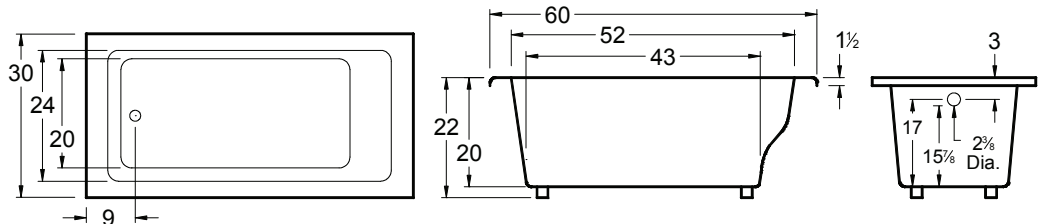


Tub pictured with optional waste &amp; overflow.


 All bathtub dimensions are  $\pm 1/2"$ .


### Builder Series



### Luxury Series




### Platinum Series




### Combination



(pump and blower location only)



### Airbath System II



### Airbath System III

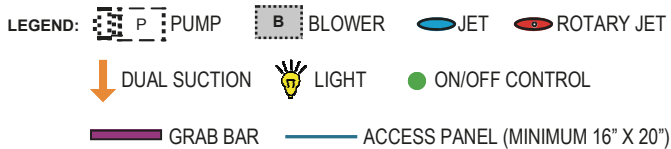

### INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- Airbath III units may be 1 1/2" - 2 1/2" higher than stated.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Cut-out dimension: 58" x 28"

### DIMENSIONS

60" x 30" x 22" ( 1524 x 762 x 559 mm)

Whirlpool Operating Gallons = 40 (Liters = 152)

Gallon to Overflow = 65 (Liters = 246)

**TUB FLOOR:** NON-Textured

**UNDERMOUNT:** Yes

- Advise Americh when ordering to ensure there are no issues with deck mounted controls.
- Always take dimensions directly from the unit.

### ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### OPTIONAL ACCESSORIES

- Apron
- Chromotherapy\*
- Grab Bars: 9" \* - 14" - 16"
- High Density Insulation\*
- Inline Heater
- Jets: Additional or Rotary\*
- Pillows: 13" - Angle\* - Head Support System  
Head and Shoulder Support System
- Quiet Pump with Built-in Heater Upgrade\*
- Remote Control Upgrade (Select Series Only)
- Tile Flange Kit
- Trim Kit Upgrade\*
- Waste & Overflow\*

\*Standard on Platinum Series

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.