robern

BIC6038

## Features

- *Surface mount only*
- *Patented concealed surface-mounting system*
- *Mirrored doors and interior, matte silver interior*
- *Patented swing-out magnifying mirror*
- *Rust-free aluminum construction*
- *Three adjustable glass shelves*
- *Patented push button opener*
- *Polymer safety-back doors*
- *3/4″ (1.9 cm) Beveled mirrored doors and 1/4″ (6 mm) beveled fascia*
- *60″ (152.4 cm) x 38-1/8″ (96.8 cm) x 5-1/2″ (14 cm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *None applicable*

Specified Model

Model	Description	
BIC6038	Two flat beveled mirrored door cabinets with inset mirror	❑

Required Accessories - For Surface-Mount Installations Only		
SK38	Side kit for surface mount cabinets without TLS light strip	❑
SKL38	Side kit for surface mount cabinets with TLS light strip	❑

Optional Accessories		
SLBBI60	Safety-lock box	❑
TLS60	15 bulb light strip	❑
CAHC-A	Cabinet mounted halogen light, chrome and glass shade	❑
CAHC-B	Cabinet mounted halogen light, all chrome shade	❑
CAHC-CE	Cabinet mounted halogen light, ebony black shade	❑
CAHC-CS	Cabinet mounted halogen light, matte silver shade	❑
Cabinet cannot be recessed when using a CAHC light. Refer to the Price Guide for more information.		

Technical Information

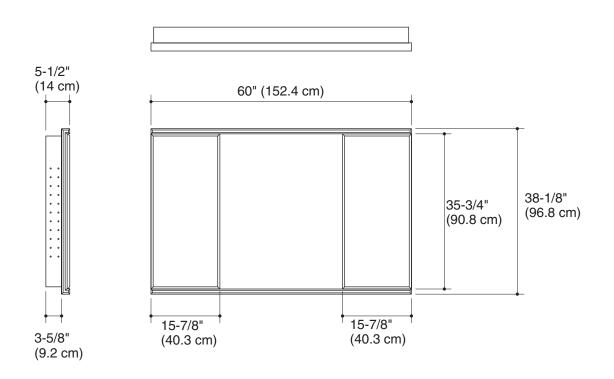| Roughing-in opening	58-3/4″ (149.2 cm) x 34-3/4″ (88.3 cm) x 4″ (10.2 cm)
Door opening angle	180°

Installation Notes

Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors must be inserted before installing the screws.

Recessed cabinets project 1-7/8" (4.8 cm) from wall.

5-1/2" (14 cm)

60" (152.4 cm)

35-3/4" (90.8 cm)

38-1/8" (96.8 cm)

3-5/8" (9.2 cm)

15-7/8" (40.3 cm)

15-7/8" (40.3 cm)

Product Diagram

robern