
TOTO®

CST464MF

Aquia® III Dual Flush ADA Toilet, 1.6 GPF / 0.9 GPF



CST464MF - Aquia III Toilet SS204 - SoftClose® Oval Seat

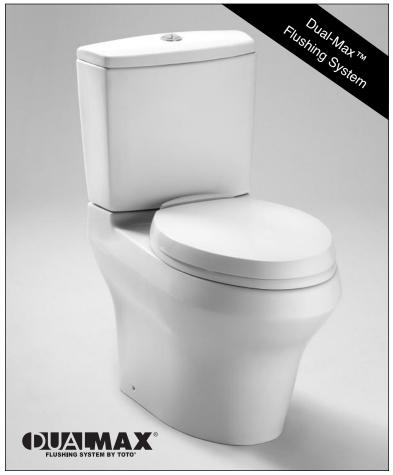

Dual-Max™ Technology: Optional 1.6 Gpf / 6 Lpf or 0.9 Gpf / 3.4 Lpf



Choose a SoftClose® toilet seat, or upgrade to a Washlet™.



- Elongated skirted design, two piece toilet
- Dual-Max[™] Flushing System
- Push button style flush option
- Excellent rim wash
- Large, 2-1/8" fully glazed trapway

Decorative, high profile two piece toilet. Dual Flush (1.6 Gpf / 6 Lpf & 0.9 Gpf / 3.4 Lpf) performance option to allow appropriate water usage.

Tank cover, fittings, chrome plated push button, less seat.

■ CST464MF

Elongated toilet bowl & tank, 12" rough-in, less seat. Universal height.

CT464F

Aquia III Elongated bowl only, 12" rough-in. Universal height.

□ ST464M

Aquia III tank and cover only. Complete with tank trim and coupling components.

□ SS114

SoftClose® Seat: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ SS204

SoftClose® Seat: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ SC134

Elongated, open front seat with lid.

□ SC534

Elongated, open front seat less lid.

Colors:

Standard #01 Cotton

Optional See price book for

 $additional\ colors$

Flush Button:

Standard Chrome Plated



CST464MF

Aguia® III Dual Flush ADA Toilet, 1.6 GPF / 0.9 GPF

■ PERFORMANCE

TOTO[®] Dual-Max[™] toilets received high ratings during ANSI/ASME and CSA testing. Designed to offer optional 1.6 Gpf or 0.9 Gpf to meet the demands for water savings in growing population centers.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf

0.9 Gpf / 3.4 Lpf

Flush System: Gravity Feed

(Dual-MaxTM System)

Min. Water Pressure: 8 psi
Water Surface: 4-1/2" x 6"
Trap Diameter: 2-1/8"
Rough-in: 12" rough-in

Acoustic Reading: 65-70dB (may vary depending

on room construction)

Warranty: One Year Limited Warranty

Material: Vitreous china

Shipping Weight: CT464F

78 lbs. **ST464M** 30 lbs.

Shipping Dimensions: CT464F

28-1/2"L x 15"W x 18"H

ST464M

16"L x 7"W x 17"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M, A112.19.14 and CAN/CSA B 45 requirements.


Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others. Watersense compliant.

Meets and exceeds ASME A112.19.2 standards for drainline carry distance with a 2% grade and 4" I.D. pipe.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.

These dimensions and specifications are subject to change without notice.

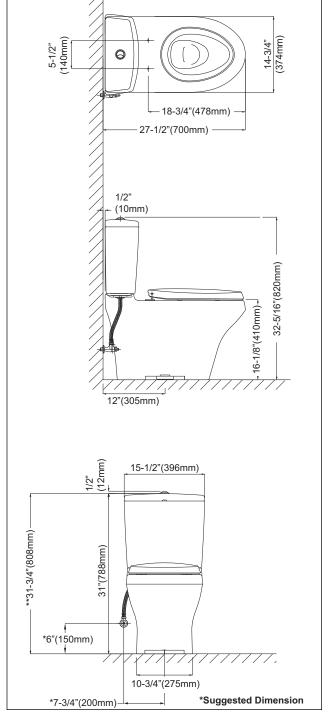

CST464MF - Aquia III ADA Toilet



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com Printed in U.S.A.® TOTO® LTD. 12/07 #A10500