


Features

- Recess or surface mount
- Patented concealed surface-mounting system
- Mirrored doors and interior, matte silver interior
- Patented swing-out magnifying mirror
- Rust-free aluminum construction
- Three adjustable glass shelves
- Patented push button opener
- Polymer safety-back doors
- 3/4" (1.9 cm) Beveled mirrored doors and 1/4" (6 mm) beveled fascia
- 36" (91.4 cm) x 27-1/2" (69.9 cm) x 5-1/2" (14 cm)



TFC3628

Codes/Standards Applicable

Specified model meets or exceeds the following:

Description

None applicable

Model

Specified Model

| TFC3628 | Three door cabinet | |
|--------------|--|--|
| Required Ac | cessories - For Surface-Mount Installations Only | |
| SK28 | Mirrored side kit (mounts to cabinet) | |
| SKL28 | Mirrored side kit (mounts to cabinet with TLS light strip) | |
| Optional Acc | essories | |
| SLBTF36 | Safety-lock box | |
| TLS36 | 9 bulb light strip | |
| CAHC-A | Cabinet mounted halogen light, chrome and glass shade | |
| CAHC-B | Cabinet mounted halogen light, all chrome shade | |
| CAHC-CE | Cabinet mounted halogen light, ebony black shade | |
| CAHC-CS | Cabinet mounted halogen light, matte silver shade | |
| Cabinet cann | ot be recessed when using a CAHC light. Refer to the Price Guide for more information. | |

Page 1 of 2 1099167-4-A USA: 1-800-877-2376 www.robern.com

C SERIES THREE DOOR CABINET

Technical Information

| Roughing-in opening | 34-3/4" (88.3 cm) x 24" (61 cm) x 4" (10.2 cm) |
|---------------------|--|
| Door opening angle | 180° |


Installation Notes

Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors must be inserted before installing the screws.

Recessed cabinets project 1-7/8" (4.8 cm) from wall.

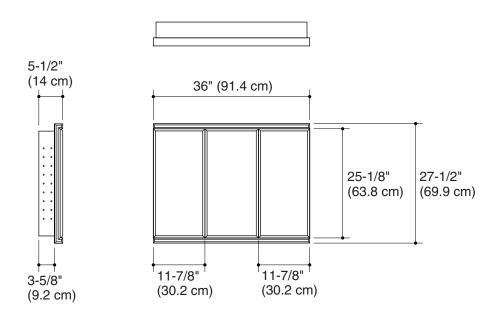

Product Diagram

