



Always check the website for the most updated specifications: www.americh.com

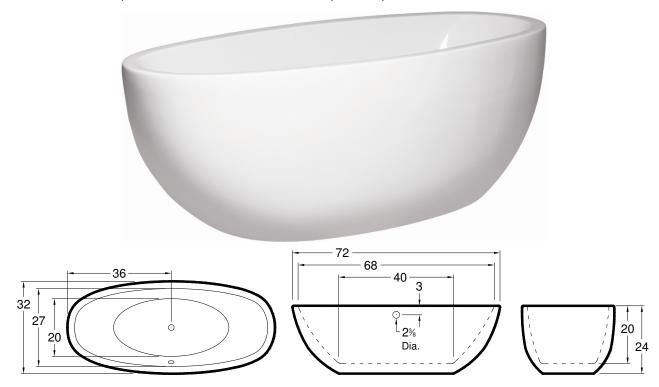

All bathtub dimensions are $\pm 1/2$ ".

Airbath System II



LEGEND:

В

BLOWER

ON/OFF CONTROL

ACCESS PANEL (BUILT IN)

STANDARD EQUIPMENT:

• Integral Waste & Overflow

Available in: Polished Chrome, Polished Brass,

Polished Nickel, Satin Nickel,

Oil Rubbed Bronze

INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- Access panel for Airbath[®] systems included with the Contura II series.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.

DIMENSIONS:

72" x 32" x 24" (1829 x 813 x 610 mm) Gallon to Overflow = 95 (Liters = 360) Factory installed integral drain.

TUB FLOOR: Non-Textured

Undermount: No

AVAILABLE COLORS: White and Biscuit

ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

OPTIONAL ACCESSORIES

- Chromotherapy
- Remote Control Upgrade

CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- Canadian Standards Association (CSA)
- ANSI Z124.1 ANSI A112-19.7 ANSI A112.19.8 Contact Americh for additional approvals.