


- Prior to installation, please check recieved items against the "Parts List".
  Please report any missing items to your retailer immediately.
- Protect all surfaces from sharp objects, high heat sources, direct prolonged sunlight and chemical hazards.
- Professional installation recommended.



Parts List

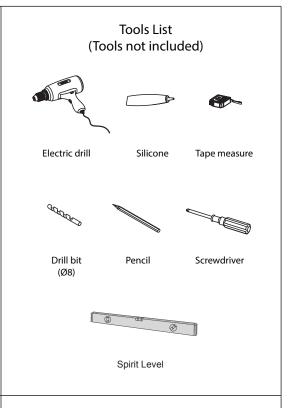




2 per mirror

2 per mirror


Mark the position of the screw holes on the wall by measuring the space between the centers of the mounting brackets on the back of the vanity. Vertical position (X) is decided by the purchaser remember to mark low enough to accommodate the sink on the top of the vanity counter or it will be too high when installed. Use a spirit level to ensure the screws holes are horizontal.




WC-R4300-30-SGL RESIN INSTALLATION GUIDE


1 Mirror

**2** Insert the anchor into the screw hole for reinforcement.











4 Adjust the mounting attachment as required

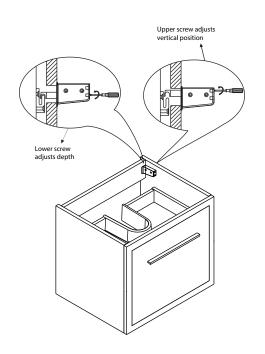


**5** Adjust hinges as required.




WC-R4300-30-SGL RESIN INSTALLATION GUIDE


**6** Use a spirit level to ensure the vanity is level left to right. Adjust if needed.




7 Use a spirit level to ensure the vanity is front to back. Adjust if needed.




**8** Attach counter to cabinet with silicone sealant applied to top of front and side cabinet edges. Do not over-apply. Allow to dry for 24 hours for proper curing.



**9** Licensed professional installation is recommended. These instructions are for mounting into studs or other in-wall reinforcement, drywall alone is not sufficient to support wall-hung wanities. Other installation techniques may require a licensed professional.



WC-R4300-30-SGL RESIN INSTALLATION GUIDE

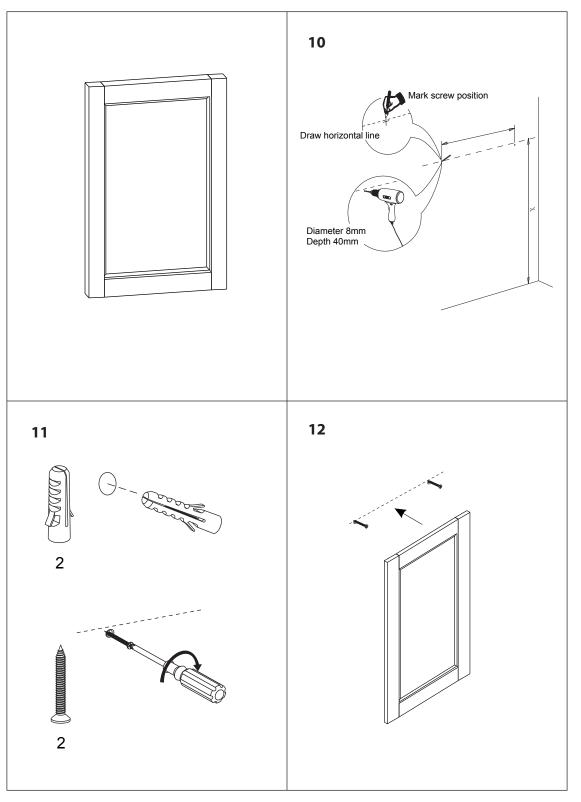

WC-R4300-30-SGL RESIN INSTALLATION GUIDE