


*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY: _____ DATE: _____

☐ REVISION REQUESTED

LIGHTED MIRROR SPECIFICATION REQUIREMENTS:
UL 1598 approved including section 16.23 glass support test
Finger print protection (edge frosted mirrors only)
HardCoat - anti-corrosive backing
Maintenance-free over 7 Years
Safety Backed
Made in America

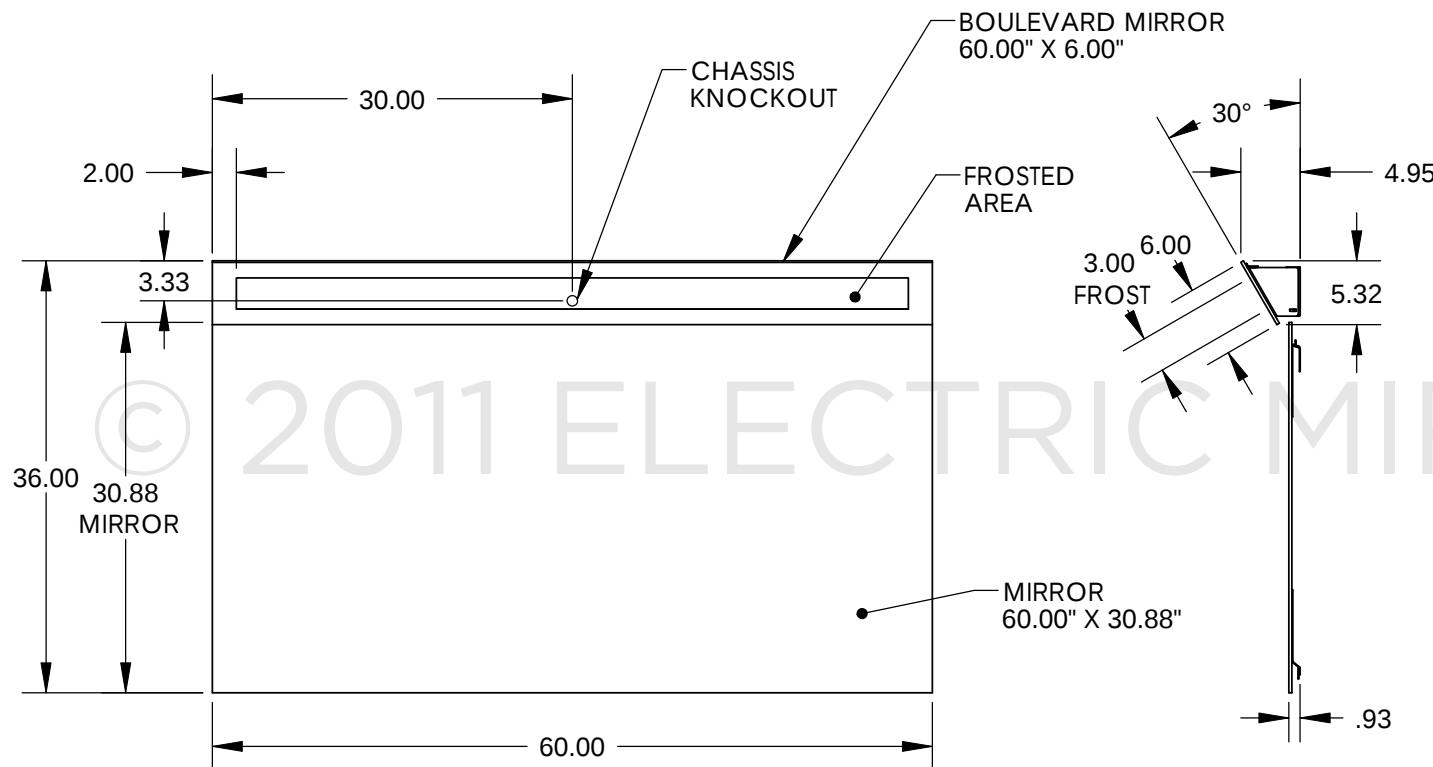

SPECIFICATION:

SPECIFY THE LIGHTING STATION ABOVE THE BATHROOM VANITY. THE TOP OF THE FIXTURE SHOULD BE A MINIMUM OF 6'6\"/>

THE MC CABLE IS BROUGHT IN THROUGH THE CHASSIS KNOCKOUT. INSERT GROUND WIRE IN GROUNDED CONNECTOR. INSERT HOT AND NEUTRAL WIRE INTO LUMINAIRE DISCONNECT. NO ELECTRICAL BOX REQUIRED. ELECTRICAL POWER SHOULD BE CONTROLLED BY A LIGHT SWITCH.

FIXTURE SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT. MOUNTING HOLES ARE PROVIDED IN THE CHASSIS.

POWER REQUIREMENTS:

120-277 VOLTS, 1.33 - .58 AMPS

LAMP SPECIFICATION:

NOMINAL LENGTH (in): 60
NOMINAL WATTAGE: 80
BULB: 2 X T5HO
AVG RATED LIFE (hrs): 35,000
CCT (K): 3000
LUMENS: 6650
CRI: 85

*PATENTED

ELECTRIC MIRROR® 2011


BOU-01-60.00X6.00 & MIR-36.00X30.88

SALES AID - 10/5/11

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

DIMS IN INCHES	REV. A
SCALE: 1:16	PG.1 OF 2
CONTACT US: consultants@electricmirror.com T+1.425.776.4946	

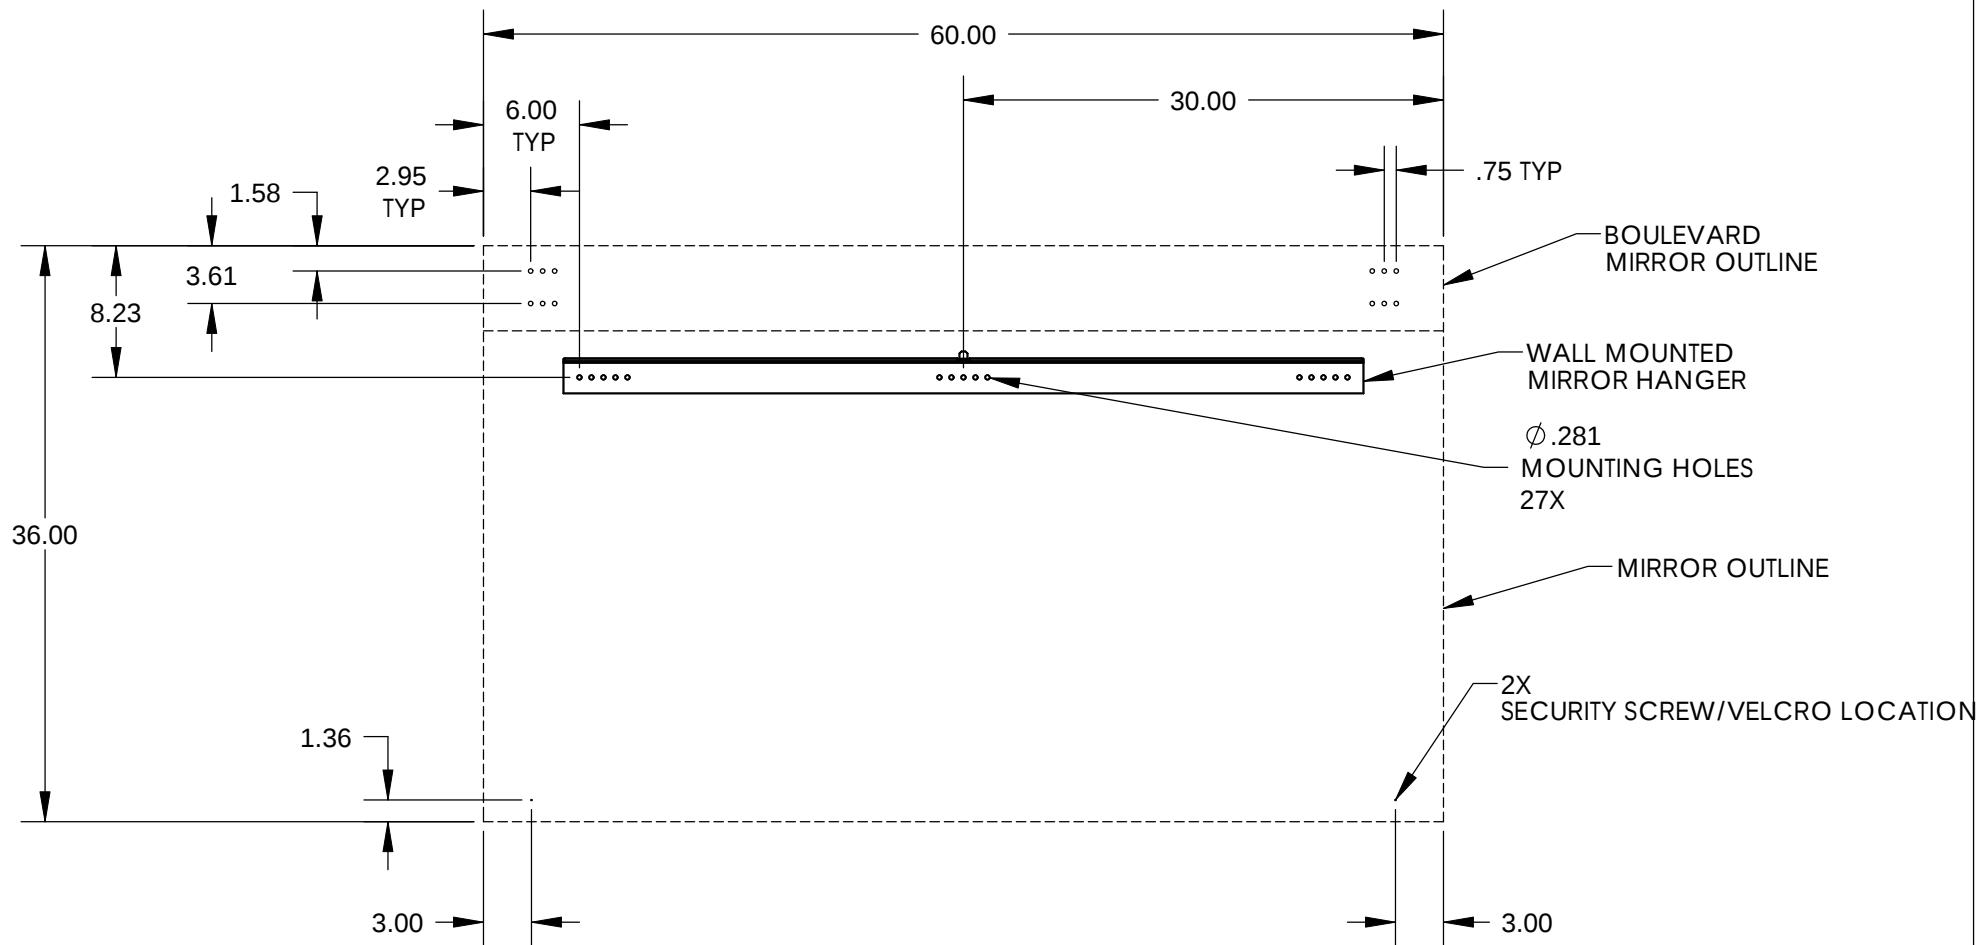

WALL MOUNTING DETAILS

ELECTRIC MIRROR® 2011

BOU-01-60.00X6.00 & MIR-36.00X30.88

SALES AID - 10/5/11

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2011 ELECTRIC MIRROR

DIMS IN INCHES	REV. A
SCALE: 1:12	PG.2 OF 2
CONTACT US: consultants@electricmirror.com T+1.425.776.4946	